



XMPP

XEP-0379: Pre-Authenticated Roster Subscription

Georg Lukas

<mailto:georg@op-co.de>

<xmpp:georg@yax.im>

2017-03-06

Version 0.2.0

Status	Type	Short Name
Experimental	Standards Track	pars

This document defines a protocol and URI scheme for pre-authenticated roster links that allow a third party to automatically obtain the user's presence subscription. The goal of this is to make onboarding of new XMPP IM contacts as easy as possible.

Legal

Copyright

This XMPP Extension Protocol is copyright © 1999 – 2018 by the [XMPP Standards Foundation](#) (XSF).

Permissions

Permission is hereby granted, free of charge, to any person obtaining a copy of this specification (the "Specification"), to make use of the Specification without restriction, including without limitation the rights to implement the Specification in a software program, deploy the Specification in a network service, and copy, modify, merge, publish, translate, distribute, sublicense, or sell copies of the Specification, and to permit persons to whom the Specification is furnished to do so, subject to the condition that the foregoing copyright notice and this permission notice shall be included in all copies or substantial portions of the Specification. Unless separate permission is granted, modified works that are redistributed shall not contain misleading information regarding the authors, title, number, or publisher of the Specification, and shall not claim endorsement of the modified works by the authors, any organization or project to which the authors belong, or the XMPP Standards Foundation.

Warranty

NOTE WELL: This Specification is provided on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE.

Liability

In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall the XMPP Standards Foundation or any author of this Specification be liable for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising from, out of, or in connection with the Specification or the implementation, deployment, or other use of the Specification (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if the XMPP Standards Foundation or such author has been advised of the possibility of such damages.

Conformance

This XMPP Extension Protocol has been contributed in full conformance with the XSF's Intellectual Property Rights Policy (a copy of which can be found at <https://xmpp.org/about/xsf/ipr-policy>) or obtained by writing to XMPP Standards Foundation, P.O. Box 787, Parker, CO 80134 USA).

Contents

1 Introduction

Romeo is an active XMPP IM (Instant Messaging) user. He convinces Juliet (who doesn't have an XMPP account yet) to install a client and register with some server. Now, Romeo only needs to create a mutual presence subscription with her, without yet knowing her JID.

This specification allows Romeo to create an out-of-band link (URI) which, when opened in Juliet's (or another user's) client, will:

- Add Romeo to Juliet's roster (with a display name optionally specified by Romeo)
- Add Juliet to Romeo's roster (without a pre-defined display name)
- Establish a mutual presence subscription between Romeo and Juliet

The perceivable effect is that with a single click, Romeo and Juliet become "friends" in terms of XMPP presence subscription.

2 Requirements

This specification makes use of XMPP URIs. The basic URI scheme for XMPP is defined in [RFC 5122](#)¹ and extended in [XMPP URI Query Components \(XEP-0147\)](#)² to support different actions like "roster" for roster addition and "subscribe" for presence subscription.

3 Pre-Authenticated Roster Subscription

The process of mutual roster addition and subscription involves multiple steps:

1. Generation of invitation link
2. Out-of-band transmission and presentation of the link
3. Subscription request to the user by the link receiver (new contact)
4. Approval by the user and mutual subscription request
5. Approval by the new contact


The general idea of the protocol and the details of the individual steps are outlined in the following.

¹RFC 5122: Internationalized Resource Identifiers (IRIs) and Uniform Resource Identifiers (URIs) for the Extensible Messaging and Presence Protocol (XMPP) <<http://tools.ietf.org/html/rfc5122>>.

²XEP-0147: XMPP URI Query Components <<https://xmpp.org/extensions/xep-0147.html>>.

3.1 General Idea

As Romeo doesn't know Juliet's JID, he needs to send an out-of-band invitation. Later, his client needs to match an incoming subscription request to this invitation, so it can perform a secure automatic roster addition and subscription approval. This matching is accomplished by means of an authentication token, which is generated by Romeo's client, added to the invitation link and then carried over into the subscription request eventually made by Juliet's client. Romeo's client can then compare the token received in a subscription request to the list of issued tokens, and automatically approve the subscription.

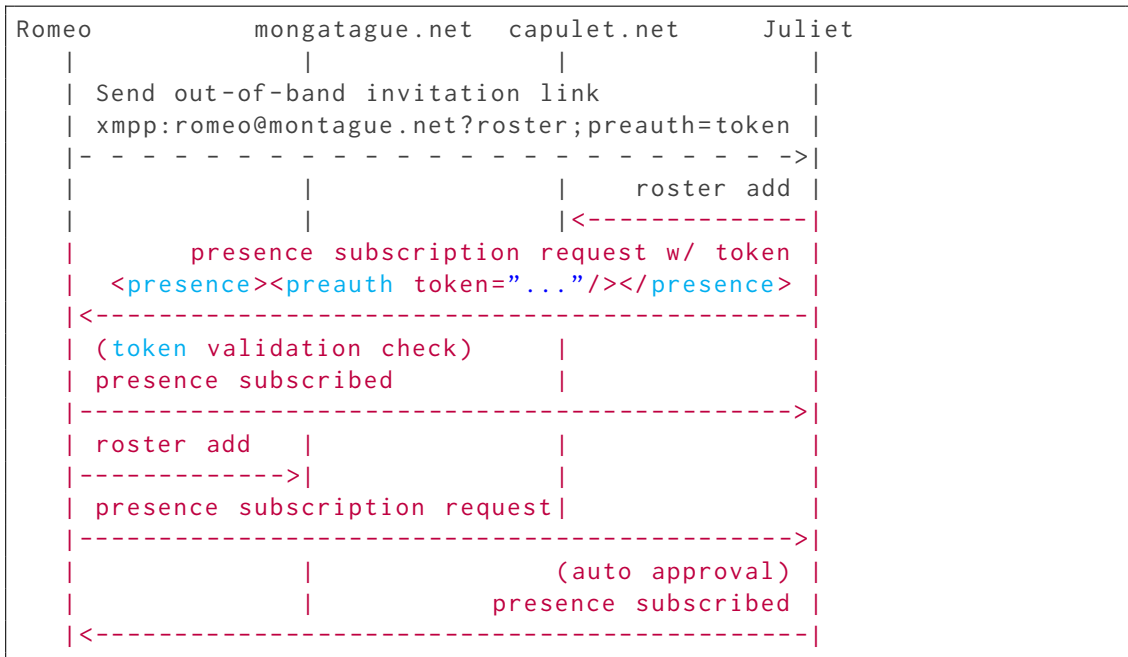

3.2 Generation of Invitation Link

Whenever Romeo wishes to invite somebody to his roster, his client will generate an invitation link that contains a new authentication token. This document extends the "roster" URI action defined in XEP-0147 with a new key-value parameter named "preauth" to store the generated token. Romeo's client will create an **xmpp:** link containing Romeo's JID, the "roster" action, the "preauth" parameter with the token value, and optionally a "name" parameter with the suggested display name.

Listing 1: Invitation Link with Roster Action and Authentication Token

```
xmpp:romeo@montague.net?roster;preauth=1tMFqYDdKhfe2pwp;name=Romeo+
Montague
```

If the "preauth" parameter is present, the processing client is supposed not only to add the user to the roster, but also to automatically send a subscription request containing the